


## ■ Digital expansion modules

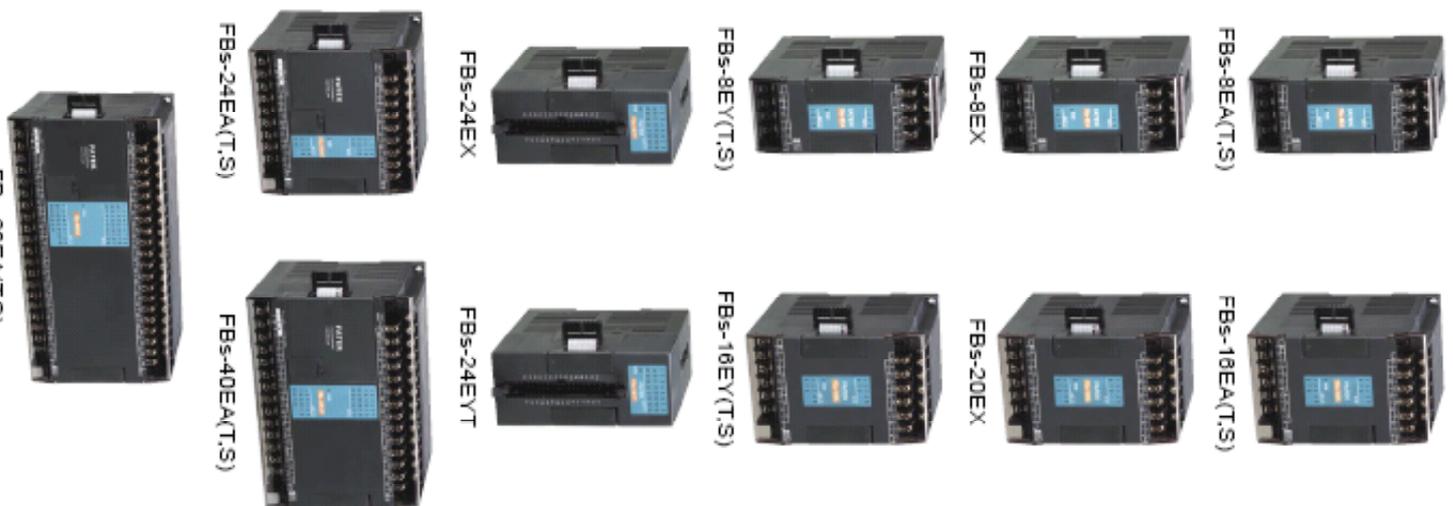

Specification Model number	Digital input		Digital output		Relay	Thyristor AC (1A)	Wiring mechanism	Dimension
	24VDC	Low speed 4.7mS	Transistor (5 ~ 30VDC)	High density (0.1A)				
FBS-8EA					4 points			
FBS-8EA(T,S) ◇	4 points		4 points					
FBS-8EAS						4 points		
FBS-8EX		8 points						
FBS-8EY					8 points			
FBS-8EYT ◇			8 points					
FBS-8EYS						8 points		
FBS-16EA					8 points			
FBS-16EA(T,S) ◇	8 points		8 points					
FBS-16EAS						8 points		
FBS-20EX		20 points						
FBS-16EY					10 points			
FBS-16EYT ◇			10 points					
FBS-16EYS						10 points		
FBS-24EX		24 points						
FBS-24EYT				24 points				
FBS-24EA					10 points			
FBS-24EA(T,S) ◇	14 points		10 points					
FBS-24EAS						10 points		
FBS-40EA					10 points			
FBS-40EA(T,S) ◇	24 points		10 points					
FBS-40EAS						10 points		
FBS-60EA					24 points			
FBS-60EA(T,S) ◇	30 points		24 points					
FBS-60EAS						24 points		

◇ : Transistor output type: Blank—SINK output (NPN), J—SRCE output (PNP)