



## Digital 16 Outputs DC 24 V

**RIO 16O**

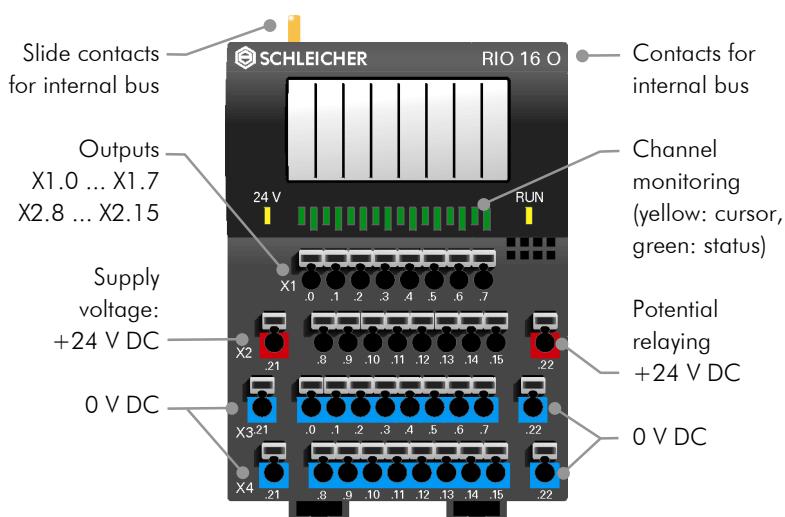

**Block diagram**

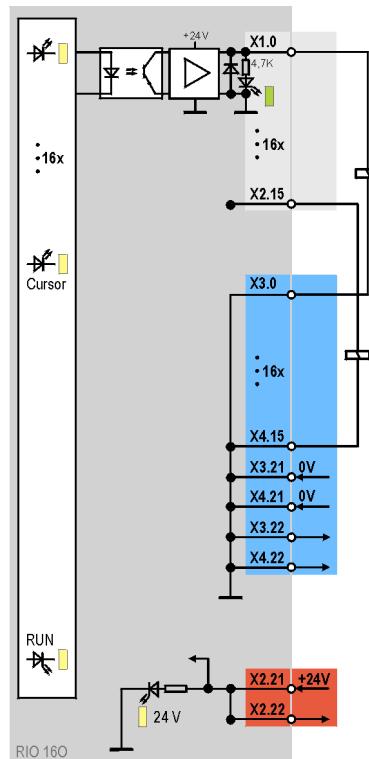

The RIO 16O digital module provides 16 output channels for binary position signals with 24 V level. The channels are isolated from the internal bus and are short-circuit-proof and overcurrent-protected. The maximum output current per channel is 1 A. If more current is required the outputs can be connected in parallel in groups of four. The signal state of each channel can be read on an LED. Additional jumper levels can be created with the pluggable terminal extension.

| <b>Technical Data</b>                    |  | <b>RIO 16O</b> |
|--|--|----------------|
| Article number                           | 364 157 59   |                |
| Number of inputs/outputs                 | 16 outputs binary  |                |
| Data width                               | 1 bit per channel I/O  |                |
| External supply voltage                  | DC 24 V ( $\pm 20\%$ , max. 5% residual ripple)  |                |
| Power consumption                        | 0.25 W (without load current) from external 24 V supply<br>0.325 W from internal 5 V supply                  |                |
| Connection system                        | Two-wire (with RIO KE 16 terminal extension: four-wire)  |                |
| <b>Outputs</b>                           |  |                |
| Switching level                          | H level: supply voltage -0.5 V ( $I_L < 1$ A)<br>L level: $\leq 1$ V ( $I_L = 0$ A)                          |                |
| Output current per output                | Max. 1 A, short-circuit-proof and overcurrent-protected, can be connected in parallel: 0-3, 4-7, 8-11, 12-15 |                |
| Total current for whole module           | Max. 8 A   |                |
| Simultaneity                             | 50%  |                |
| Free-wheeling diode                      | Integrated   |                |
| Isolation                                | Each channel individually isolated from internal bus by optocouplers   |                |
| Signal delay                             | <100 $\mu$ s (hardware)  |                |
| For general technical data see next page |  |                |

## Technical Data RIO IP20

### Electrical data

|                |                                       |
|----------------|---------------------------------------|
| Supply voltage | 24 V DC ± 20% max. 5% residual ripple |
|----------------|---------------------------------------|

### Connection system

|                     |  |
|---------------------|--|
| Sensors / actuators | Spring terminal  |
| Field bus           | Profibus-DP: Subminiature, 9-pin   |
| Supply voltage      | Interbus: Screw terminals<br>CAN DeviceNet / CANopen: Open style connector         |
|                     | Spring terminal  |
| Cable cross-section | Finely stranded 0.14 – 1.5 mm <sup>2</sup> , single-core 0.5 – 2.5 mm <sup>2</sup> |

### Housing and installation

|                        |   |
|------------------------|---|
| Type of protection     | IP 20 to EN 60529   |
| Dimensions (W x H x D) | RIO microLine PLC: 74.5 x 93 x 51 mm<br>RIO BC Bus Couplers: 74.5 x 93 x 51 mm<br>RIO EC Bus Couplers: 63 x 93 x 51 mm<br>RIO Expansion Modules: 69 x 93 x 51 mm<br>RIO Compact I/Os: 69 x 93 x 51 mm<br>RIO Terminal Extensions: 69 x 36 x 45 mm |
| Rail                   | DIN rail EN 50022-35  |
| Installation position  | Vertical, free air circulation  |

### Climatic Conditions

|                               |   |
|-------------------------------|---|
| Ambient operating temperature | 0 ... +55°C (category KV to DIN 40040)                |
| Storage temperature           | -25 ... +70°C (category HS to DIN 40040)              |
| Relative humidity             | 30 ... 95% (category F to DIN 40040), no condensation |
| Air pressure in operation     | 860 ... 1060 hPa                                      |

### Mechanical strength

|           |   |
|-----------|---|
| Vibration | 10 ... 57 Hz constant amplitude 0.075 mm<br>57 ... 150 Hz constant acceleration 1 g (to DIN IEC 68-2-6) |
|-----------|---|

### Electromagnetic compatibility

|                         |  |
|-------------------------|--|
| Electrostatic discharge | EN 61000-4-2: 4 kV contact discharge   |
| Electromagnetic fields  | EN 61000-4-3: field intensity 10 V/m, 80 ... 1000 MHz                                |
| Burst                   | EN 61000-4-4: 2 kV on DC supply lines, 1 kV on I/O signal and serial interface lines |
| Interference emissions  | EN 55011: Limit Category A, Group 1  |