



## Digital 8 Inputs/Outputs DC 24 V

RIO 8I/O

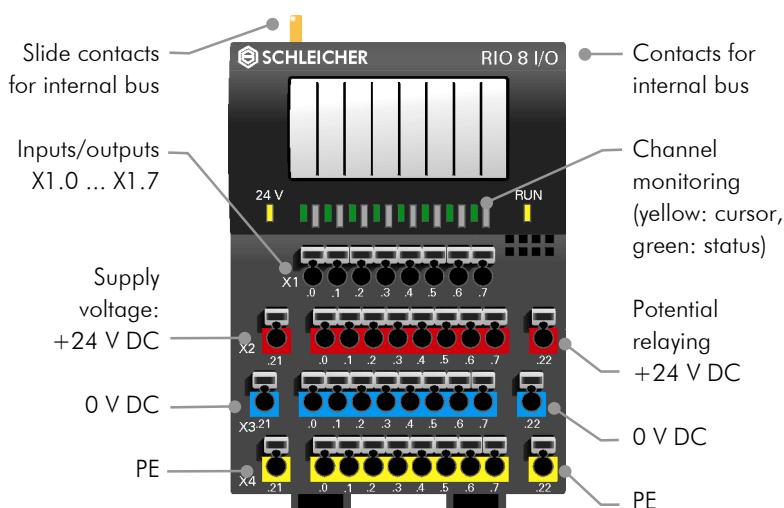

The RIO 8I/O digital module provides 8 combination channels with four-wire connection system for binary DC signals with 24 V level. Each combination channel can be used as input or output as required. The respective assignment is detected automatically by the module. The channels are isolated from the internal bus. The signal state of each channel can be read on an LED. The maximum output current per channel is 1 A. If more current is required the outputs can be connected in parallel in groups of four.

Block diagram

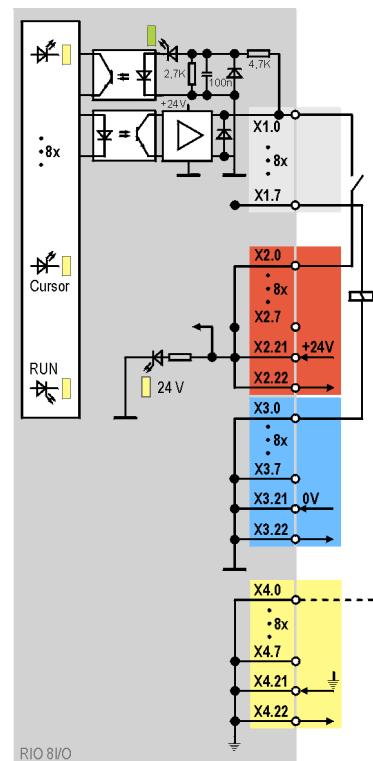

### Technical Data

### RIO 8I/O

Article number	364 140 98
Number of inputs/outputs	8 combination channels binary, can each be used as input or output
Data width	1 bit per channel I/O
External supply voltage	DC 24 V ( $\pm 20\%$ , max. 5% residual ripple)
Power consumption	0.25 W (without input current/load current) from external 24 V supply 0.325 W from internal 5 V supply
Connection system	Four-wire

### Inputs

Switching level	H level +15 ... +30 V L level -30 ... +5 V
Input current	min. H level (+15V): $I \geq 3.6$ mA max. L level (+5V): $I \leq 1.2$ mA typ. (+24 V): $I = 6.1$ mA
Isolation	Each channel individually isolated from internal bus by optocouplers
Signal delay	<100 $\mu$ s (hardware)

### Outputs

Switching level	H level: supply voltage -0.5 V ( $I_L < 1$ A) L level: $\leq 1$ V ( $I_L = 0$ A)
Output current per output	Max. 1 A, short-circuit-proof and overcurrent-protected, can be connected in parallel: 0-3, 4-7
Total current for whole module	Max. 8 A
Simultaneity	100%
Free-wheeling diode	Integrated
Isolation	Each channel individually isolated from internal bus by optocouplers
Signal delay	<100 $\mu$ s (hardware)

For general technical data see next page

## Technical Data RIO IP20

### Electrical data

Supply voltage	24 V DC ± 20% max. 5% residual ripple
----------------	---------------------------------------

### Connection system

Sensors / actuators	Spring terminal
Field bus	Profibus-DP: Subminiature, 9-pin
Supply voltage	Interbus: Screw terminals CAN DeviceNet / CANopen: Open style connector
	Spring terminal
Cable cross-section	Finely stranded 0.14 – 1.5 mm <sup>2</sup> , single-core 0.5 – 2.5 mm <sup>2</sup>

### Housing and installation

Type of protection	IP 20 to EN 60529
Dimensions (W x H x D)	RIO microLine PLC: 74.5 x 93 x 51 mm RIO BC Bus Couplers: 74.5 x 93 x 51 mm RIO EC Bus Couplers: 63 x 93 x 51 mm RIO Expansion Modules: 69 x 93 x 51 mm RIO Compact I/Os: 69 x 93 x 51 mm RIO Terminal Extensions: 69 x 36 x 45 mm
Rail	DIN rail EN 50022-35
Installation position	Vertical, free air circulation

### Climatic Conditions

Ambient operating temperature	0 ... +55°C (category KV to DIN 40040)
Storage temperature	-25 ... +70°C (category HS to DIN 40040)
Relative humidity	30 ... 95% (category F to DIN 40040), no condensation
Air pressure in operation	860 ... 1060 hPa

### Mechanical strength

Vibration	10 ... 57 Hz constant amplitude 0.075 mm 57 ... 150 Hz constant acceleration 1 g (to DIN IEC 68-2-6)
-----------	---

### Electromagnetic compatibility

Electrostatic discharge	EN 61000-4-2: 4 kV contact discharge
Electromagnetic fields	EN 61000-4-3: field intensity 10 V/m, 80 ... 1000 MHz
Burst	EN 61000-4-4: 2 kV on DC supply lines, 1 kV on I/O signal and serial interface lines
Interference emissions	EN 55011: Limit Category A, Group 1