



LAYOUT

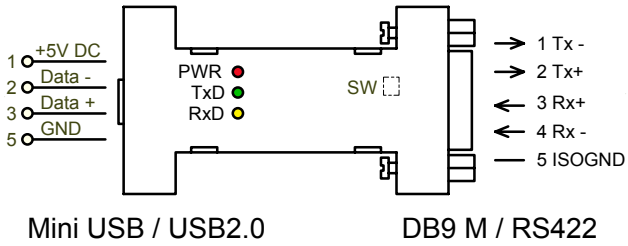

SW
OFF terminator disconnected
ON terminator connected

RS422 LINE CONFIGURATION

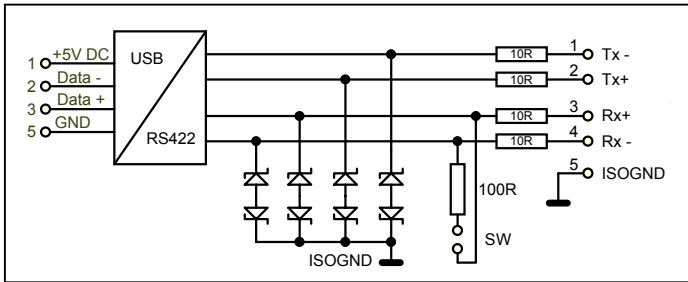

CONDITIONS OF WARRANTY

ComErgon Ltd. provides full warranty of 24 month for serial interface module MINI 5.4/422 starting on the day of purchase. The warranty is except for the cases in which the functioning of the module has been affected by faulty manipulation, natural catastrophes or other external factors.

COMERGON

MINI serie

MINI 5.4/422

isolated
USB – RS422

TECHNICAL DATA

compatibility
supported OS

USB 1.1, USB 2.0
 WIN 98, 98SE,
 ME, 2000, XP, CE

transfer mode
max. transfer rate
supported signals

RS422 - full duplex
 920 kb/s
 RxD, TxD

max. recommended line length RS422

1 200 m

isolation

1 kV

selectable terminator

100 R

connector USB

mini USB 5pin

connector RS422

D-SUB 9 pin M

optical indication

RxD, TxD, PWR

overvoltage (soft) protection RS422

300W 8/20µs

supply voltage

from USB (+5V DC)

supply

max. 1W

dimension

63 x 17 x 34 mm

COMERGON

spol. s r.o.

Cachticka 23, 831 06 Bratislava
 Slovak Republic

tel.: +421-2- 4488 9090
 tel./ fax.: +421-2- 4487 3525

e-mail: service@comergon.sk
 http: www.comergon.sk